



# S500FAL

## ELEVADOR DOBLE SOBRE SUELO ULTRAPLANO (155MM)




### Parámetros Técnicos | Technical Parameters

Altura de elevación	Lifting Height	2000mm
Levantando peso	Lifting Weight	5000kg
Altura más baja	Lowest Height	155mm
Longitud de la plataforma	Platform Length	4500mm
Ancho de la plataforma	Platform Width	620mm
Fuente de alimentación	Power Supply	380v (por defecto) 220v (4t)

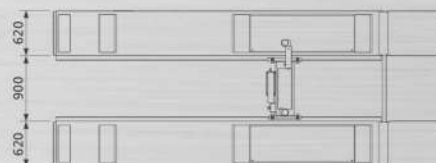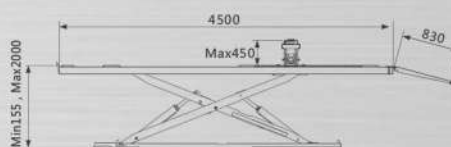

- Elevador para alineado de direcciones, válido para inspección y mantenimiento de autos y vehículos comerciales. Dispone de dispositivo de seguridad para bloqueo automático, así como sistema hidráulico por válvula solenoide que garantiza estabilidad y larga vida.
- Used for wheel alignment of light vehicles inspection and maintenance, designed as super-thin structure, equipped easy. Electric air lock safety insurance device, hydraulic system uses imported solenoid valve and sealing parts, to guarantee lift's stability and working life.

### Configuración Estándar | Standard Configuration



- Elevador regulable en altura para ruedas libres.

Bloqueo de seguridad  
Safety Lock

Carril de movimiento en acero inoxidable  
Stainless Steel Slide Rail

Interrupción-Switch  
Limit Switch

- Adjustable Sub slide

